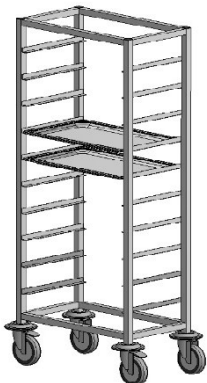




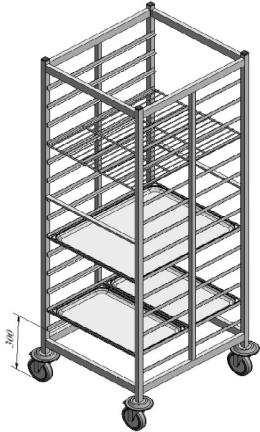


TRANSPORTNA KOLICA INOX

GN container trolley, s/s

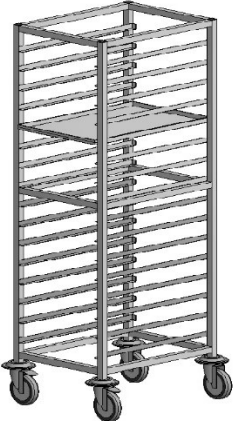
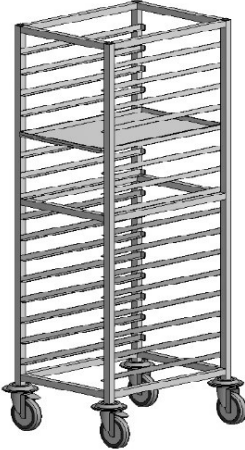

Niko

Za 10xGN-1/1 for 10xGN-1/1	DVOSTRUKA za 16xGN-1/1 Double for 16xGN-1/1	Za 16xGN-1/1 s policom na vrhu for 16xGN-1/1 with top
		
KGT-11	KT2-1/1	KTP2-1/1
590 x 335 x 1480 mm	750 x 540 x 850 mm	750 x 540 x 850 mm
razmak između vodilica 115 mm shelf spacing 115 mm	razmak između vodilica 80 mm shelf spacing 80 mm	razmak između vodilica 80 mm shelf spacing 80 mm
Ø125 mm kotači (dva kotača s kočnicom) castors (two castors with brakes)	Ø125 mm kotači (dva kotača s kočnicom) castors (two castors with brakes)	Ø125 mm kotači (dva kotača s kočnicom) castors (two castors with brakes)

Za 8xGN-2/1 ili 16xGN-1/1 for 8xGN-2/1 or 16xGN-1/1	Za 8xGN-2/1 ili 16xGN-1/1 s policom na vrhu for 8xGN-2/1 or 16xGN-1/1 with top	Za 14xGN-2/1 ili 28xGN-1/1 for 14xGN-2/1 or 28xGN-1/1
		
KT 1-2/1	KTP1-2/1	KGT-21
590 x 660 x 850 mm	590 x 660 x 850 mm	560 x 660 x 1755 mm
razmak između vodilica 80 mm shelf spacing 80 mm	razmak između vodilica 80 mm shelf spacing 80 mm	razmak između vodilica 107 mm shelf spacing 107 mm
Ø125 mm kotači (dva kotača s kočnicom) castors (two castors with brakes)	Ø125 mm kotači (dva kotača s kočnicom) castors (two castors with brakes)	Ø125 mm kotači (dva kotača s kočnicom) castors (two castors with brakes)

TRANSPORTNA KOLICA INOX za pekarske tave 600 x 400 mm *600 x 400 mm GN container trolley, s/s*

Niko

ZA PEKARSKE TAVE 600x400 mm <i>600x400 mm container trolley</i>		REGALNA ZA PEKARSKE TAVE 600x400 mm, zatvorena sa tri strane <i>600x400 mm container trolley with panel on 3 sides</i>
		
KPT 3	KPT 6	KPTZ-H85
Ø125 mm kotači (dva kotača s kočnicom) <i>castors (two castors with brakes)</i>		kapacitet 8 tava, <i>loading capacity 8 containers</i>
kapacitet 16 tava <i>loading capacity 16 containers</i>	kapacitet 20 tava <i>loading capacity 20 containers</i>	razmak između vodilica 80 mm <i>shelf spacing 80 mm</i>
razmak između vodilica 82 mm <i>shelf spacing 82 mm</i>	razmak između vodilica 80 mm <i>shelf spacing 80 mm</i>	kotači polyamid Ø125 mm; dva kotača s kočnicom, (korištenje za unos u rashladne komore) <i>polyamid castors Ø125 mm; two castors with brakes, (for use in the cold chamber)</i>
dim. 460 x 600 x 1600 mm	dim. 460 x 600 x 1790 mm	dim. 462 x 610 x 850 mm
		težina / <i>weight</i> : 35 kg